

SPHERICAL BEARINGS - SRL-2RS SERIES

SPHERICAL PLAIN BEARING


ISO12240-1 - SERIES G

MAINTENANCE VERSION

FITTED WITH PROTECTION RINGS

STEEL / STEEL COUPLING

TEMPERATURE RANGE: -20°C ► +90°C

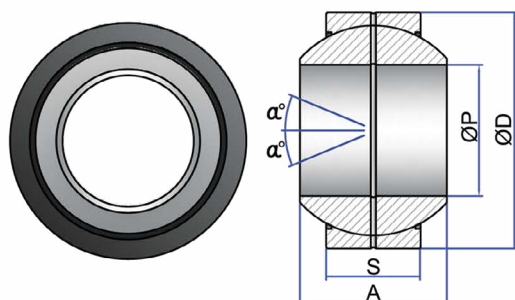

ORDER CODE	P Ø(mm)	D Ø(mm)	A (mm)	S (mm)	MOVEMENT ANGLE (α°)	DYNAMIC LOAD (kn)	STATIC LOAD (kn)
SRL15-2RS	15	30	16	10	16	21.2	106
SRL17-2RS	17	35	20	12	19	30	146
SRL20-2RS	20	42	25	16	17	48	240
SRL25-2RS	25	47	28	18	17	62	310
SRL30-2RS	30	55	32	20	17	80	400
SRL35-2RS	35	62	35	22	16	100	500
SRL40-2RS	40	68	40	25	17	127	640
SRL45-2RS	45	75	43	28	15	156	780
SRL50-2RS	50	90	56	36	17	245	1220
SRL60-2RS	60	105	63	40	17	315	1560
SRL70-2RS	70	120	70	45	16	400	2000
SRL80-2RS	80	130	75	50	14	490	2450
SRL90-2RS	90	150	80	55	15	610	3050
SRL100-2RS	100	160	85	55	14	655	3250
SRL110-2RS	110	180	100	70	12	950	4750
SRL120-2RS	120	210	115	70	16	1080	5400
SRL140-2RS	140	230	130	80	16	1370	6800
SRL160-2RS	160	260	135	80	16	1530	7650
SRL180-2RS	180	290	155	100	14	2120	10600
SRL200-2RS	200	320	165	100	15	2320	11600
SRL220-2RS	220	340	175	100	16	2550	12700
SRL240-2RS	240	370	190	110	15	3050	15300
SRL260-2RS	260	400	205	120	15	3550	18000
SRL280-2RS	280	430	210	120	15	3800	19000

SPHERICAL BEARINGS - SRLB SERIES


SPHERICAL PLAIN BEARING

ISO12240-1 - SERIES G

MAINTENANCE FREE VERSION

HARD CHROMIUM / PTFE COUPLING

TEMPERATURE RANGE: -50°C ► +180°C

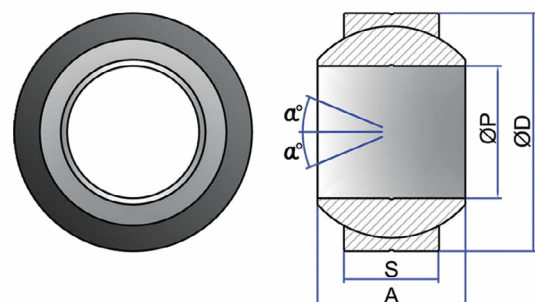

ORDER CODE	P Ø(mm)	D Ø(mm)	A (mm)	S (mm)	MOVEMENT ANGLE (α°)	DYNAMIC LOAD (kn)	STATIC LOAD (kn)
SRLB06	6	16	9	5	21	5.85	14.6
SRLB08	8	19	11	6	21	8.65	21.6
SRLB10	10	22	12	7	18	11.4	28.5
SRLB12	12	26	15	9	18	17.6	44
SRLB15	15	30	16	10	16	22.4	56
SRLB17	17	35	20	12	19	31.5	78
SRLB20	20	42	25	16	17	51	127
SRLB25	25	47	28	18	17	65.5	166
SRLB30	30	55	32	20	17	210	350