


HYDRAULIC TOE JACKS

CAPACITY 2.5 - 50 TON
STROKE 100mm - 140mm
HOUSING WELDED ONTO FORGED BASE
HEAT TREATED & CHROMED ROD
TOP & TOE LIFT SYSTEM
INTERNAL SAFETY VALVE

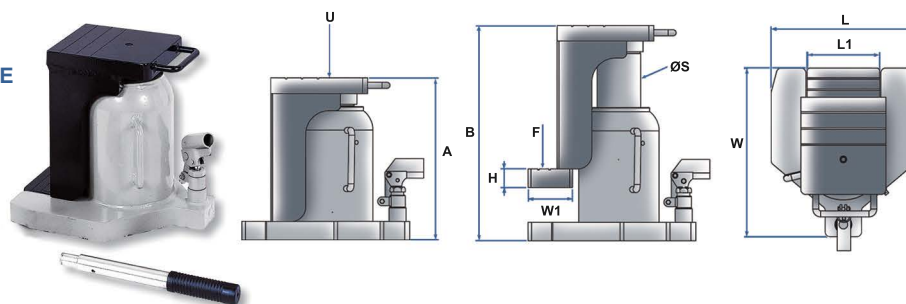


ORDER CODE	STROKE (mm)	TOE LIFT STROKE (mm)	U TOP LIFT CAPACITY (ton)	F TOE LIFT CAPACITY (ton)	A (mm)	B (mm)	S Ø(mm)	L x W BASE DIMENSION (mm)	H (mm)	L1 x W1 TOE LIFT DIMENSION (mm)	WEIGHT (kgs)
HTJ02	100	70	2.5	1.2	194	294	19	140 x 190	19	65 x 50	6.5
HTJ04	110	80	4	2	204	314	25	150 x 200	19	65 x 50	8
HTJ06	110	80	6	3	212	322	36	160 x 217	19	65 x 50	10
HTJ10	130	100	10	5	258	388	40	189 x 242	22	75 x 55	11.9
HTJ16	131	100	16	8	275	406	52	211 x 256	25	90 x 55	23
HTJ20*	140	90	20	10	303	443	56	228 x 274	25	100 x 60	31
HTJ30*	147	80	30	15	322	469	70	259 x 305	32	110 x 60	47.3
HTJ50*	148	80	50	25	333	481	90	299 x 347	38	150 x 60	77.5

* = SIZES FITTED WITH EXTERNAL SPRINGS (SPRING ASSISTED RETURN)

AIR / HYDRAULIC BOTTLE JACKS

CAPACITY 12 - 50 TON
LOW PROFILE DESIGN
FORGED BASE HEAVY CONSTRUCTION
HOUSING WELDED TO FORGED BASE
THREADED SADDLE EXTENSION IN ROD END

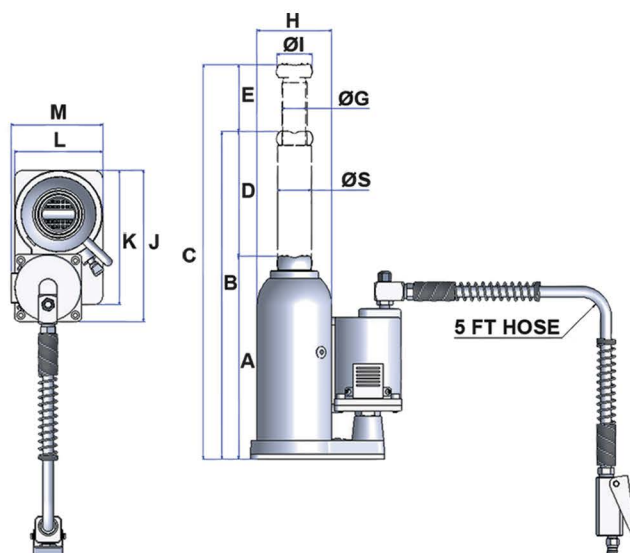

ORDER CODE	STROKE (mm)	CAPACITY (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	S Ø(mm)	G Ø(mm)	H (mm)	I Ø(mm)	J (mm)	K (mm)	L (mm)	M (mm)	HOSE LENGTH (ft)	HANDLE LENGTH (ft)	WEIGHT (kgs)
AJ120	148.5	12	241	389.5	469.5	148.5	80	39.5	29.5	89	42	180	160	105	107	5	630	6.5
AJ220	129	22	204.5	369.5	449.5	129	80	56	29.5	114	42	205	185	130	132			8
AJ300	162	30	279	441	-	162	-	65	-	140	-	235	-	-	-			10
AJ500	171	50	304	475	-	171	-	75	-	163	-	260	-	-	-			11.9

PULL RAMS

CAPACITY 5 ► 10 TON
MAXIMUM PRESSURE 10'000 PSI (700 BAR)
SPRING ASSISTED RETURN
1/4" NPT FITTINGS



ORDER CODE	PULL CAPACITY (ton)	STROKE (mm)
BK506	5	154
BK1006	10	153