

Tempsonics®

Magnetostrictive Linear Position Sensors

MH-Series MS Analog/Digital Data Sheet


- Smallest magnetostrictive Sensor for Mobile Hydraulics
- Analog output up to 2,500 mm
- Digital output up to 1,500 mm

**NOW WITH
DIGITAL OUTPUT
AVAILABLE!**



1. Product description and technology

Temposonics® sensors can be used in versatile mobile machines without any restriction and replace contact-based linear sensors like potentiometers. Highly dynamic systems are controlled safely by means of Temposonics® sensors, thus enhancing the productivity, availability and quality of the working process of the machine. Insensitive to vibration, shocks, dust and weathering influence and electro-magnetic disturbances. Temposonics® MH Series sensors are successfully used in front axle and articulated frame steering cylinders, hydraulic jacks and in steering systems for hydraulic units on agricultural and construction machinery.

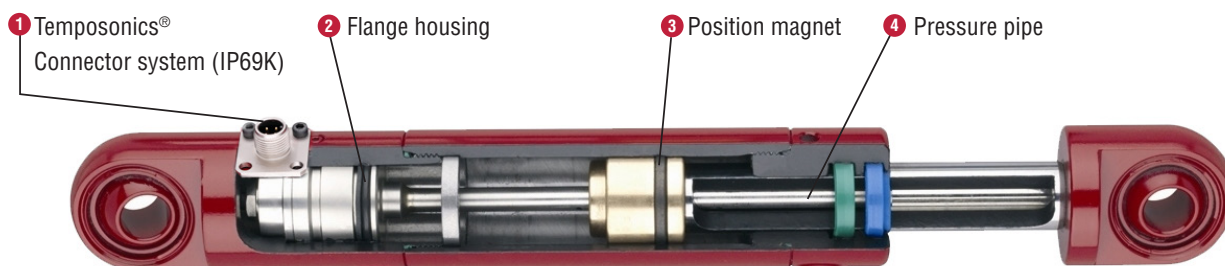

Simple Mechanics

The extremely robust sensor consists of the following main parts:


- ❶ The innovative connector system which is easy to install in a few seconds, any soldering or crimping needless, dust-and waterproof up to IP69K.
- ❷ The flange housing with built-in electronics and signal converter.
- ❸ The position magnet as only moving part, which is assembled into the piston bottom. This permanent magnet travels wear-free and contactless along the pressure pipe and measures the actual position.
- ❹ The pressure pipe placed within the drilled piston rod contains the protected magnetostrictive sensing element.

- Due to small dimensions MH sensors require only little space
- Suitable for operating pressures up to 350 bar
- Unaffected by surrounding media such as ageing or foaming oil
- Insensitive to shock and vibration
- Designed for all current supply voltages (12/24 VDC)
- Temposonics® sensors offer all common used output signals:
 - Analog: VDC/mA
 - Bus protocols: CANopen, SAE J1939

Magnetostriction

Temposonics® linear sensors are based on the magnetostrictive technology. By measuring the actual position with a non-contact position magnet the sensor operates 100% wear-free. The absolute operating principle enables reliable readings without any reference point or recalibration. A mechanical strain pulse is triggered by the travelling position magnet. The runtime of this ultrasonic wave is measured precisely and compiled into standard electronic output signals.


Measurement principle

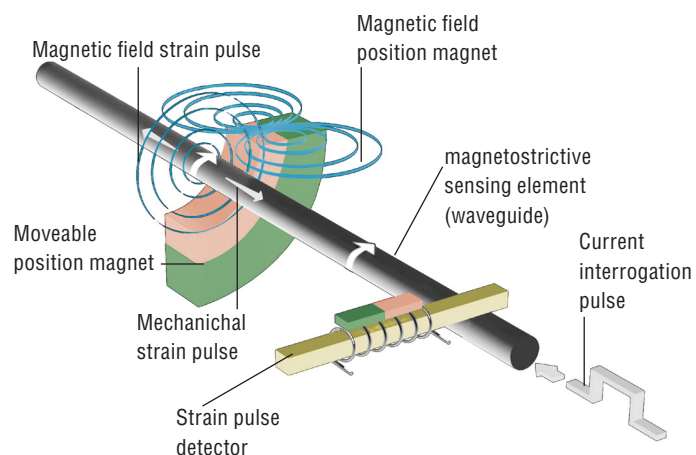


2. Temposonics® connector system M12

MTS presents the innovative connector system for Temposonics® MH-Series


The Temposonics® Connector System meets the highest protection requirements important for a harsh environment in mobile hydraulic applications. Protection type IP69K performs water and dust proof. In addition it is even resistive against high pressure water cleaning.

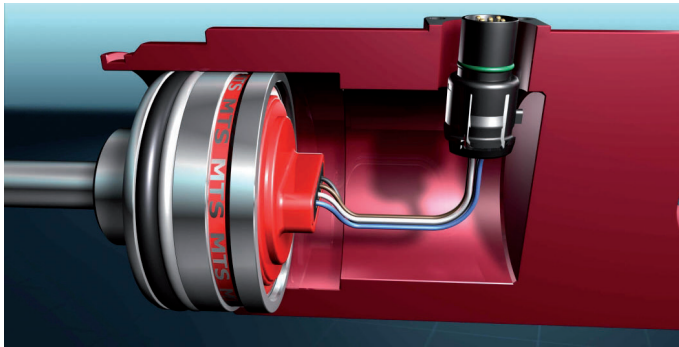


- ❶ The MH sensor is delivered by MTS together with the new connector system:
The connector insert carrier is already connected to the sensor conductors, i.e. no soldering, any colour or connection mistake.

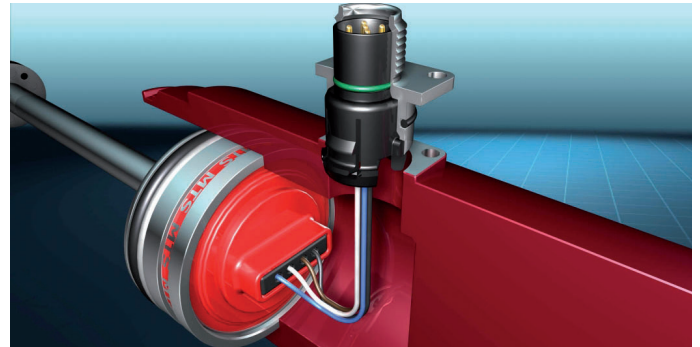

- ❷ The connector insert is taken out of the cylinder through a bore hole. The flange can easily be clicked in position from outside.

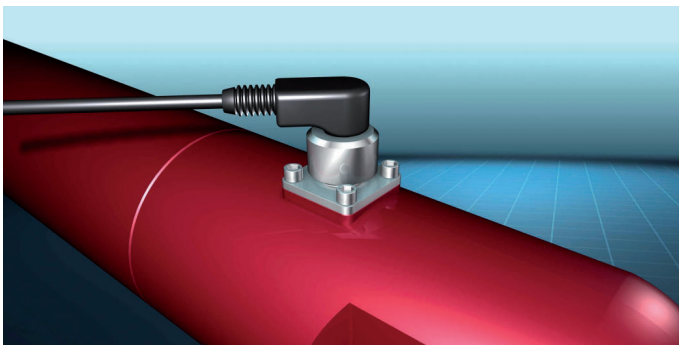


- ❸ Four standard screws must be tightened to mount the connector system on the cylinder. In case of using angled type connectors the connector insert can be rotated inside the flange in 45° steps.

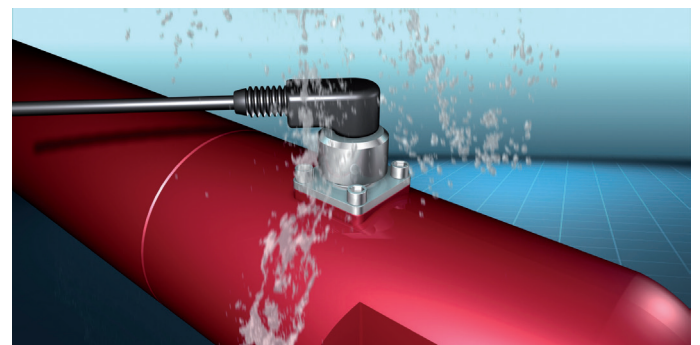

- ❹ With a corresponding mating plug the connector system fulfills an IP rating of IP69K.

- Absolutely easy and safe installation.
- No brazing or crimping of connecting leads is required.

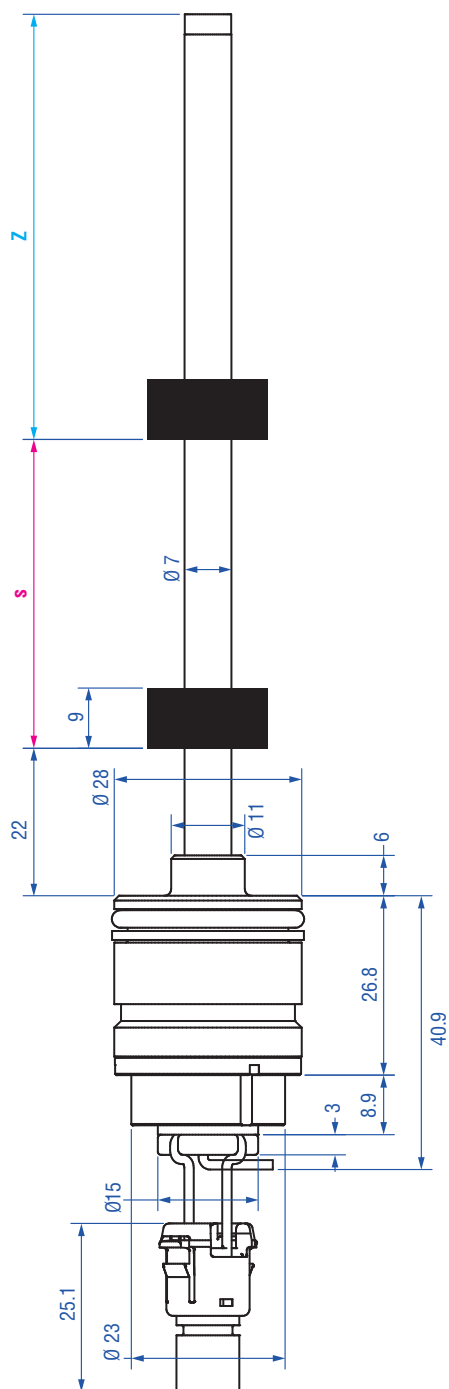

Mechanical configurations

Form factor	D	Z = 63.5 mm ($s \leq 2500$ mm*), Ø 7 mm pressure pipe
	F	Z = 36.5 mm ($s \leq 1200$ mm), Ø 7 mm pressure pipe
Stroke range	s	0050...2500 mm (in 5 mm steps)*
Wire length	w	60...240 mm (in 20 mm steps)

Model no. MH-D-1500 M-N 1 2 G-3-V12

F	H	V11	A01	C01	4	7F
e.g.: s = 1500 mm	F			C01	4	7F
e.g.: w = 120 mm				J01	3	FD

Electrical configurations


MH Analog	G	1 = VDC 3 = GND 4 = Sig 2 = n.c.
	H	1 = VDC 2 = Sig 3 = GND 4 = n.c.
MH Digital	F	2 = VDC 3 = GND 4 = CAN HI 5 = CAN LO 1 = n.c.
MH Analog	A01	4...20 mA
	V12	0.5...4.5 VDC
MH Digital	C01	CANopen
	J01	SAE J1939
Baudrate	3	250 kbit/sec
	4	125 kbit/sec
Node ID	7F	hex
	FD	hex

All dimensions in mm

Please see detailed model configuration on page 11 and 13.

*Note: Digital output only up to 1500 mm stroke range

3.1 Dimensions
 MS-Sensor with cable

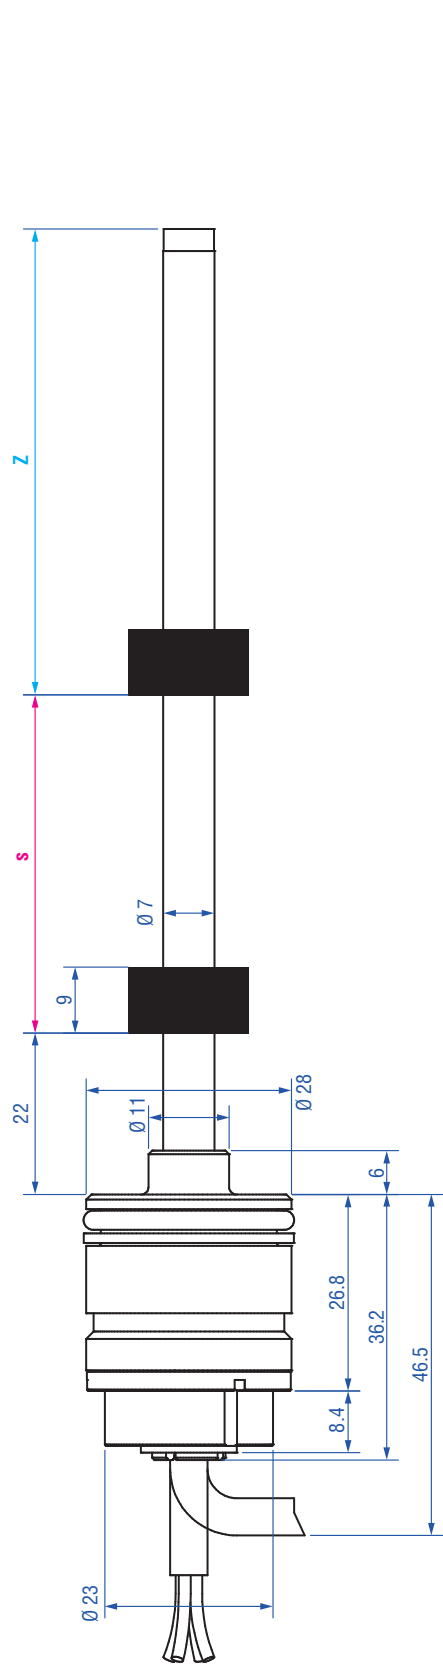

Mechanical configurations			Model no. MH D - 1 5 0 0 M - T 1 0 A - 3 - V12 V11 A01 C01 J01 7F FD									
Form factor	D	Z = 63.5 mm (s ≤ 2500 mm), Ø 7 mm pressure pipe	F									
	F	Z = 36.5 mm (s ≤ 1200 mm), Ø 7 mm pressure pipe										
Stroke range	s	0050...2500 mm (in 5 mm steps)*	e.g.: s = 1500 mm									
Wire length	w	300...9000 mm (in 100 mm steps)	e.g.: w = 1000 mm									
Electrical configurations												
MS Analog	A	BN = VDC WH = GND GN = Sig										
MS Digital		BN = VDC WH = GND GN = CAN LO YE = CAN HI										
MS Analog	A01	4...20 mA										
	V12	0.5...4.5 VDC										
MS Digital	C01	CANopen										
	J01	SAE J1939										
Baudrate	2	500 kbit/sec										
	4	125 kbit/sec										
Node ID	7F	hex										
	FD	hex										

All dimensions in mm
 *Note: Digital output only up to 1500 mm stroke range


Please see detailed model configuration on page 11 and 13.

4. In Cylinder assembly


Mechanical installation

The robust Temposonics® model MH sensor is designed for direct stroke measurement in hydraulic cylinders.
The Temposonics® MH sensor can be installed from the head side or the rod side of the cylinder depending on the cylinder design.

Example

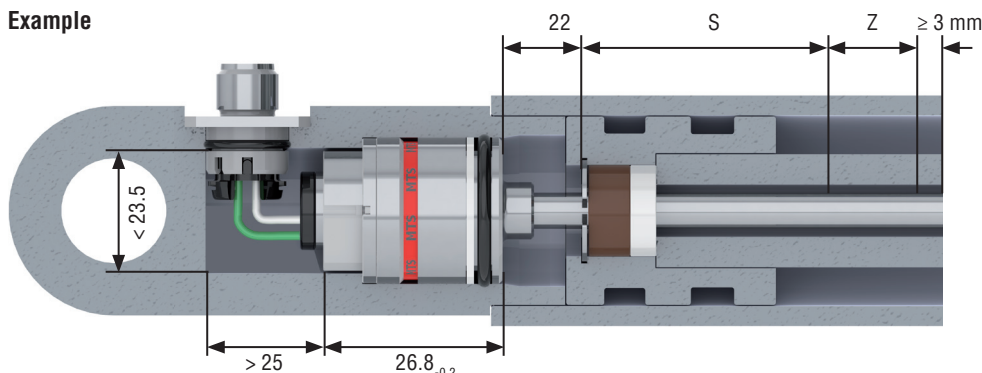


M12 connector system

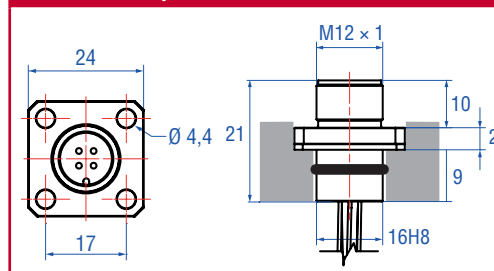


Sensor installation

The method of installation is entirely dependent on the cylinder design.
While the most common method of installation is from the rod side of the cylinder, an installation from the head side of the cylinder is also possible. In both installation methods, the hermetic sealing of the cylinder is given by an O-ring with additional back up ring.

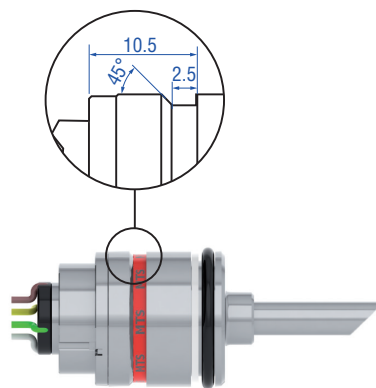

Flange housing with
O-ring and back-up ring



e.g. retaining with set screw
DIN 913 M5 × 10 (with flat point!)
max. torque 0.5 Nm


Please pay attention:

- The position magnet shall not touch the pressure pipe.
- Piston rod drilling:
Depth: $S + Z + 3 \text{ mm}$
Diameter:

Pressure Pipe Ø 7

Drilling Ø 10

- Do not exceed operating pressure.

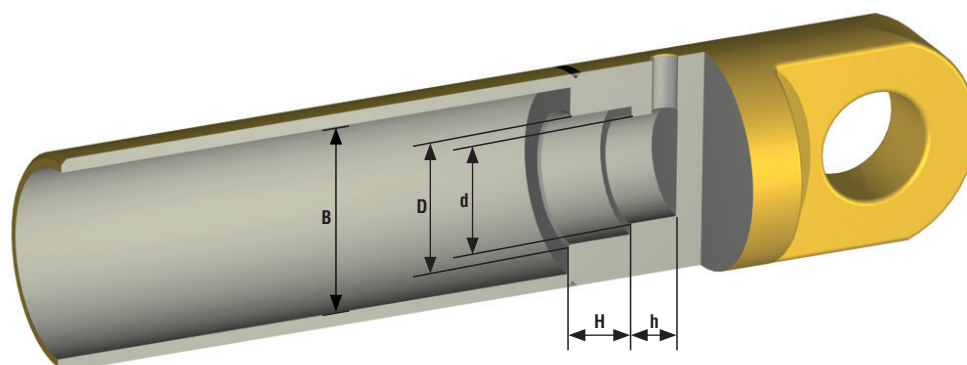

Type	B - Ø Cylinder	D - Ø min.	H - Depth	d - Ø min.	h - Depth
MS	≥ 32	28H7 screwed 28G7 welded	26.8 ^{+0.2}	23.5	< 25






Please pay attention to installation manual!

All dimensions in mm

4.1. Position magnets


Position magnets (please order separately)



Part no.	401 032	400 533	201 542-2
Dimensions			
OD _M	17.4 mm	25.4 mm	32.8 mm
ID _M	13.5 mm	13.5 mm	13.5 mm
Height	7.9 mm	7.9 mm	7.9 mm
Characteristics			
Material	PA neobond	PA ferrite	PA ferrite
Weight	ca. 5 g	ca. 10 g	ca. 14 g
Operating temperature	-40...+100 °C	-40...+100 °C	-40...+100 °C
Surface pressure*	max. 20 N/mm ²	max. 40 N/mm ²	max. 40 N/mm ²
Fastening torque for M4 screws	–	–	max. 1 Nm

*max. mechanical burden, e.g.
by circlip, lock washers etc.

4.2. Magnet assembly in piston

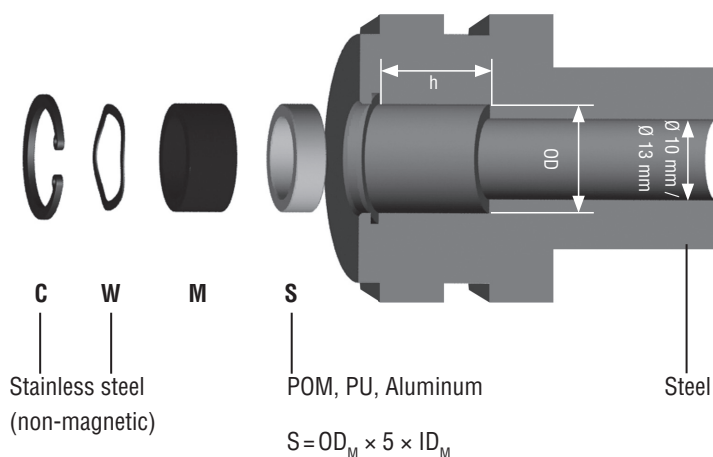

Pressure pipe	Ø 7
Piston rod drilling (min.)	Ø 10

Magnet (M)	401 032	400 533	201 542-2
OD	17.5 mm ^{+0.2}	25.5 mm ^{+0.2}	32.9 mm ^{+0.2}
h - Depth	13.5 mm	13.5 mm	13.5 mm




Please pay attention to installation manual!

All dimensions in mm

5. Electrical installation

MH Analog
PIN assignment M12 (4 pin)



Pin	G	H
1	VDC	VDC
2	n.c.	Signal
3	GND	GND
4	Signal	n.c.

Pin assignment "G"



- (1) +12/24 VDC
- (2) n.c.
- (3) GND (0 V)
- (4) Signal: mA, VDC




Pin assignment "H"



- (1) +12/24 VDC
- (2) Signal: mA, VDC
- (3) GND (0 V)
- (4) n.c.




MH Analog
wire assignment



Color	Signal
BN	VDC
WH	GND
GN	Signal

MH Digital
PIN assignment M12 (5 pin)



Pin	F
1	n.c.
2	VDC
3	GND
4	CAN HI
5	CAN LO

Pin assignment "F"




- (1) n.c.
- (2) +12/24 VDC
- (3) GND (0 V)
- (4) CAN HI
- (5) CAN LO



Bus termination external


MH Digital
wire assignment



Color	Signal
BN	VDC
WH	GND
GN	CAN LO
YE	CAN HI



 Please pay attention to installation manual!

Connecting schematics on vehicle electronics:

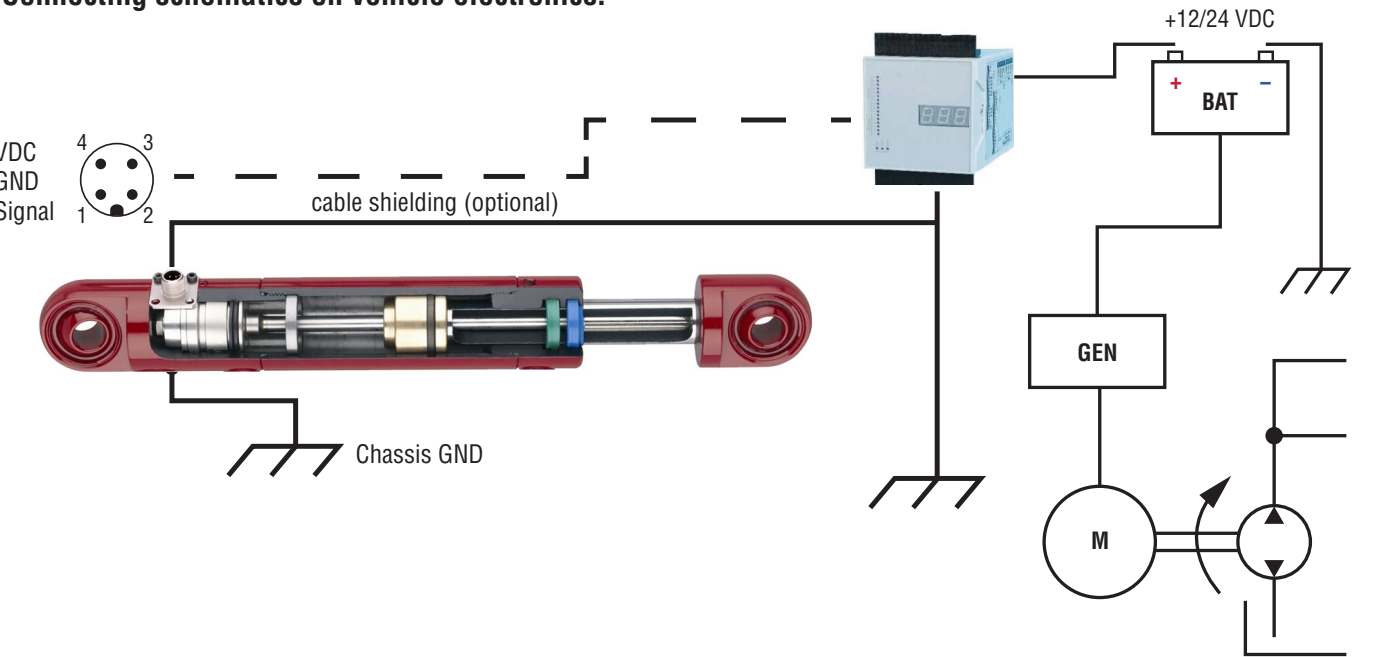

All dimensions in mm

Typical Applications for Linear Motion Control in hydraulic cylinders

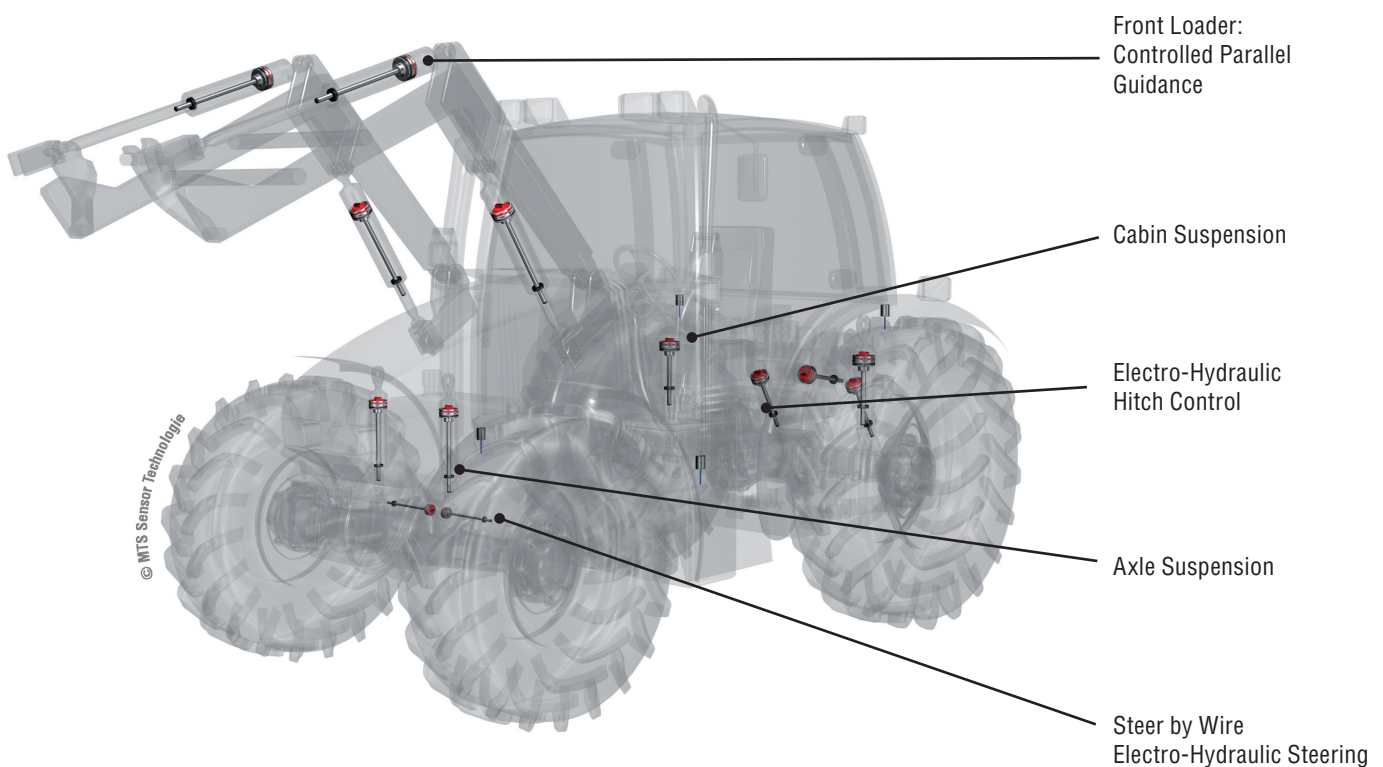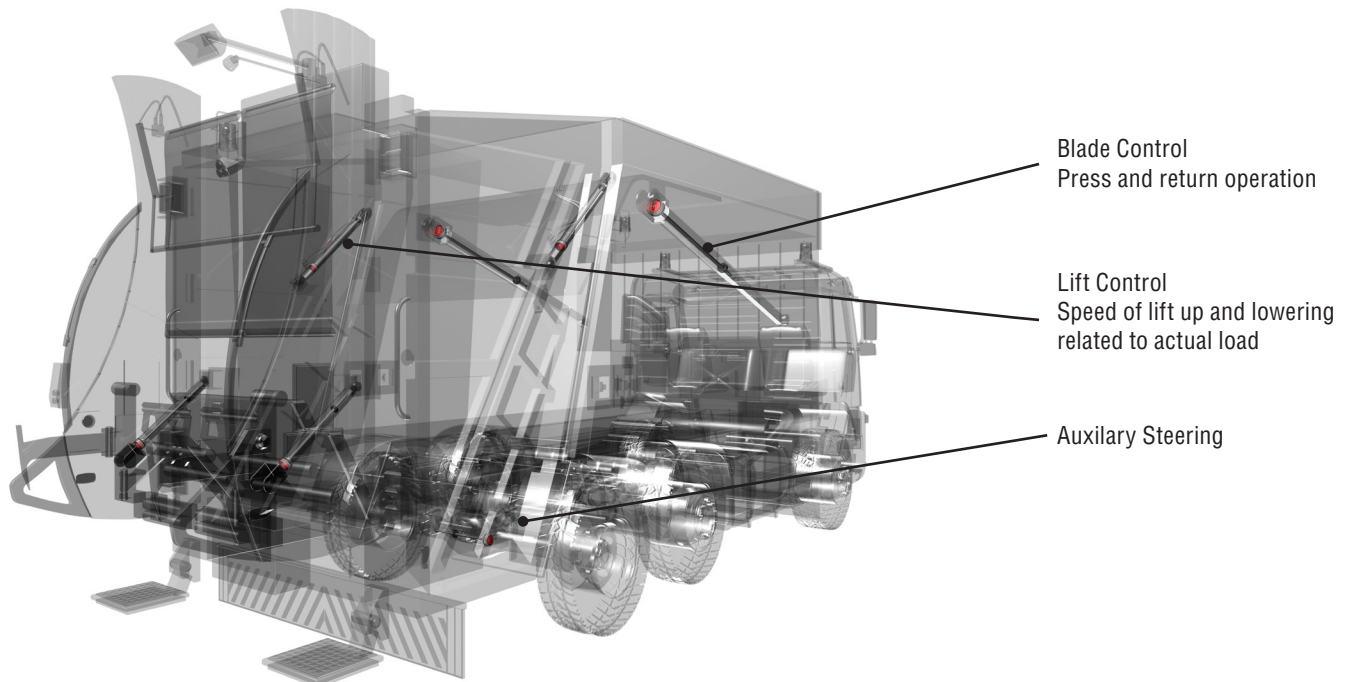

6.1 MS Analog: Technical data

Input		
Measured value	Position	
Stroke range	50...2500 mm (in 5 mm steps)	
Output		
Signal characteristic	Analog output restricted by noise or A/D converter of control unit	
Voltage	0.25...4.75 VDC / 0.5...4.5 VDC	
Current	4...20 mA	
Resolution	Typ. 0.1 mm	
Power up time	Typ. 250 ms	
Mounting zone	22 mm	
Damping	36.5 / 63.5 mm	
Accuracy		
Linearity	0050...0250 mm ≤ ±0.1 mm, 0255...2000 mm ±0.04 % (F.S.), 2005...2500 mm ≤ ±0.8 mm	
Repeatability	± 0.1 mm	
Internal sample rate	2 ms	
Setpoint tolerance	≤ 1 mm	
Operating conditions		
Mounting position	Any	
Operating temperature electronics	−40...+105 °C	
Storage temperature	−25...+ 65 °C	
Fluid temperature	−30...+ 85 °C	
Dew point, humidity	EN60068-2-30, 90 % rel. humidity, no condensation	
Pressure		
Operating pressure ratings	Pressure impulse test according DIN EN ISO 19879	
Pressure Pipe	Ø 7 mm	
Nominal operating pressure (P _N)	300 bar	
Max. overload pressure in cylinder (P _{MAX})	400 bar	
Max. static proof pressure in cylinder (P _{PROOF})	525 bar	
IP rating		
M12 connector	EN60529 (IP69K) when plugged	
Sensor housing	EN60529 (IP67)	
Environmental testing		
Shock test	IEC 60068-2-27, 100 g (11 ms) single shock, 50 g (11 ms) at 1000 shocks per axis	
Vibration test	IEC 60068-2-64, 15 g (r.m.s.) Ø 7 mm pressure pipe (10...2000 Hz) – resonance frequencies excluded	
EMC test & evaluation	ISO 14982 Agricultural and forest machines EN 13309 Construction machines Immunity: ISO 11452-2 (200 V/m Antenna), ISO 11452-4 (200 mA BCI) Emissions: CISPR 16 Transiente Impulses: ISO 7637-2 E.S.D.: ISO/TR 10605	
Materials and dimensions		
Pressure pipe	Stainless steel 1.4306 / AISI 304L	
Housing	Stainless steel 1.4305 / AISI 303	
Sealing	O-ring 23.47 ×2.62 mm NBR; Backup Ring 28 × 2 × 1.4 mm, Parker Parbaks 8-119 N1444-90 or 8-119 N0300-90	
M12 connector insert	Material: polyamide reinforces; O-ring 7 × 1.35 mm NBR 70; pins: brass with gold plated pins	
M12 flange	Brass nickel-plated with O-ring 13 × 1.6 NBR 70	
Electrical installation		
Connector	M12 male plug or cable assembly	
Supply voltage	12 VDC (8...32 VDC)	24 VDC (8...32 VDC)
Current consumption	Typ. ≤ 100 mA	Typ. ≤ 50 mA
Load (output VDC)	R _L ≥ 10 kΩ	R _L ≥ 10 kΩ
Load current (output VDC)	Typ. 0.5 mA	Typ. 0.5 mA
Loud (output mA)	R _L ≤ 250 Ω	R _L ≤ 500 Ω
Inrush current	Max. 2.5 A/2 ms	Max. 4.5 A/2 ms
Supply voltage ripple	< 1 % p-p	
Power drain	< 1 W	
Over voltage protection (GND-VDC)	Up to +36 VDC	
Polarity protection (GND-VDC)	Up to −36 VDC	
Insulation Resistance	R ≥ 10 MΩ @ 60 sec	
Electric strength	500 VDC (DC GND to chassis GND)	

Temposonics® Model configurator

M

S

a

b

M

c

d

3

e

f

a

Sensor model

M

S

Flange housing Ø 28 mm

b

Form factor

D

≤ 2500 mm, Pressure pipe Ø 7 mm, Damping: 63.5 mm

F

≤ 1200 mm, Pressure pipe Ø 7 mm, Damping: 36.5 mm

c

Stroke range (mm)

0050...2500 mm (in 5 mm steps)

d

Electrical wiring

M12 connector (VDC – GND – SIG) incl. M12 flange

N

G

4 pin (1-3-4), 60...240 mm cable length (in 20 mm steps)

N

H

4 pin (1-3-2), 60...240 mm cable length (in 20 mm steps)

Cable assembly

T

A

300...9000 mm cable length (in 100 mm steps)

e

Supply voltage

3

+12 / 24 VDC

f

Output

V

1

1

0.25...4.75 VDC

V

1

2

0.5...4.5 VDC

A

0

1

4...20 mA

Examples M12 connector

N08G = 080 mm

N10H = 100 mm

Example cable length

T10A = 1000 mm

Scope of delivery:
Position sensor, O-ring, backup-ring, M12 connector system (optional)

Please order position magnets separately!

6.2 MS Digital: Technical data

Input		
Measured value	Position and velocity	
Stroke range	50...1500 mm (in 5 mm steps)	
Velocity range	0...1000 mm/s	
Output		
Signal characteristic	Bus-protocol: SAE J1939, CANopen protocol according to CiA DS-301 V4.1, device profile DS-406 V3.1	
Resolution (position)	0.1 mm	
Resolution (velocity)	1 mm/s	
Boot up time	Typ. 400 ms	
Cycle time	CANopen: 1 ms SAE J1939: 20 ms	
Mounting zone	22 mm	
Damping	36.5 / 63.5 mm	
Accuracy		
Linearity	0050...0250 mm ≤ ±0.1 mm, 0255...1500 mm ±0.04 % (F.S.)	
Hysteresis	±0.1 mm	
Internal sample rate	1 ms	
Setpoint tolerance	±0.2 mm	
Operating conditions		
Mounting position	Any	
Operating temperature electronics	-40...+105 °C	
Storage temperature	-25...+ 65 °C	
Fluid temperature	-30...+ 85 °C	
Dew point, humidity	EN60068-2-30, 90 % rel. humidity, no condensation	
Pressure		
Operating pressure ratings	Pressure impulse test according to DIN EN ISO 19879	
Pressure Pipe	Ø 7 mm pressure pipe	
Nominal operating pressure (P _N)	300 bar	
Max. overload pressure in cylinder (P _{MAX})	400 bar	
Max. static proof pressure in cylinder (P _{PROOF})	525 bar	
IP rating		
M12 connector	EN60529 (IP69K) when plugged	
Sensor housing	EN60529 (IP67)	
Environmental testing		
Shock test	IEC 60068-2-27, 100 g (11 ms) single shock, 50 g (11 ms) at 1000 shocks per axis	
Vibration test	15 g (r.m.s.) Ø 7 mm pressure pipe (10...2000 Hz) – resonance frequencies excluded	
EMC	ISO 14982 Agricultural and forest machines	
test & evaluation	EN 13309 Construction machines	
	Immunity:	ISO 11452-2 (200 V/m Antenna), ISO 11452-4 (200 mA BCI)
	Emissions:	CISPR 25
	Transiente Impulses:	ISO 7637-2
	E.S.D.:	ISO/TR 10605
Materials and dimensions		
Pressure pipe (Ø 10 mm / Ø 7 mm)	Stainless steel 1.4306 / AISI 304L	
Housing	Stainless steel 1.4305/AISI 303	
Sealing	O-ring 23.47 ×2.62 mm NBR; Backup Ring 28 × 2 × 1.4 mm, Parker Parbaks 8-119 N1444-90 or 8-119 N0300-90	
M12 connector insert	Material: polyamide reinforces; O-ring 7 × 1.35 mm NBR 70; pins: brass with gold plated pins	
M12 flange	Brass nickel-plated with O-ring 13 × 1.6 NBR 70	
Electrical installation		
Connector	M12 male plug or cable assembly	
Supply voltage	12 VDC (8...32 VDC)	24 VDC (8...32 VDC)
Current consumption	Typ. ≤ 100 mA	Typ. ≤ 50 mA
Inrush current	Max. 1.0 A @ 2 ms	Max. 1.5 A @ 2 ms
Bus termination (HI-LO)	120 Ω	
Supply voltage ripple	< 1 % p-p	
Power drain	< 1.5 W	
Over voltage protection (GND-VDC)	Up to +36 VDC	
Polarity protection (GND-VDC)	Up to -36 VDC	
Insulation Resistance	R ≥ 10 MΩ @ 60 sec.	
Electric strength	500 VDC (DC GND to chassis GND)	

Temposonics® Model configurator

a	b	c	d	e	f	g	h
Sensor model	Form factor	Stroke range (mm)	Electrical wiring	Supply voltage	Output	Baud rate	Node ID (CANopen) / Source adress (SAE J1939)
M S Flange housing Ø 28 mm	D ≤ 1500 mm, Pressure pipe Ø 7 mm, Damping: 63.5 mm F ≤ 1200 mm, Pressure pipe Ø 7 mm, Damping: 36.5 mm	0050...1500 mm (in 5 mm steps)	M12 connector (VDC – GND – HI – LO) incl. M12 flange N 5 pin (2-3-4-5), 60...240 mm cable length (in 20 mm steps) Cable assembly T 300...9000 mm cable length (in 100 mm steps)	3 +12/24 VDC	C 0 1 CANopen cycle time 1 ms (default setting) J 0 1 SAE J1939 cycle time 20 ms (default setting)	0 1000 kbit/s 1 800 kbit/s 2 500 kbit/s 3 250 kbit/s 4 125 kbit/s 6 50 kbit/s SAE J1939 (J01) 3 250 kBit/s	CANopen (C01) hex 01...7F SAE J1939 (J01) hex 01...FD

Examples M12 connector
N08F = 080 mm


Example cable length
T10A = 1000 mm

Scope of delivery:

Position sensor, O-ring, backup-ring, M12 connector system

Please order position magnets separately!

Accessories

Position magnets			
			
OD17.4 Ring magnet Part no. 401 032	OD25.4 Ring magnet Part no. 400 533	OD33 Ring magnet Part no. 201 542-2	
Material: PA-Neobind Weight: ca. 5 g Operating temperature: -40...+100 °C Surface pressure: max. 20 N/mm²	Material: PA-Ferrit Weight: ca. 10 g Operating temperature: -40...+100 °C Surface pressure: max. 40 N/mm²	Material: PA-Ferrit-GF20 Weight: ca. 14 g Operating temperature: -40...+100 °C Surface pressure: max. 40 N/mm² Fastening torque for M4 screw: max. 1 Nm	
M12 Flange		Testkits	
			
M12 Flange (spare part) Part no. 253 769	Testkit Analog Part no. 280 618	Testkit Digital Part no. 254 267	Testsoftware Digital Part no. 625 129
	- MH-Serie analog / PWM Tester 12 VDC battery charger with adapter (adapter main plug EU, adapter main plug UK) - cable with M12 connector - cable with pigtailed wires - carrying case	- USB CAN-Modul Kit: - USB CAN-Modul - USB CAN-Modul Utility CD (driver & manual) - USB cable - cable with MTS M12 connector and RS232 connector - cable with RS232 connector - carrying case 12 VDC power supply	Software for MH Digital
Order information: For complete package please order both part numbers.			

Document Part Number:
551217 Revision E (EN) 06/2015

LOCATIONS

USA
MTS Systems Corporation
Sensors Division
3001 Sheldon Drive
Cary, N.C. 27513, USA
Tel. +1-919-677-0100
Fax +1-919-677-0200
info.us@mtssensors.com
www.mtssensors.com

JAPAN
MTS Sensors Technology Corp.
737 Aihara-machi,
Machida-shi,
Tokyo 194-0211, Japan
Tel. +81-42-775-3838
Fax +81-42-775-5512
info.jp@mtssensors.com
www.mtssensors.com

FRANCE
MTS Systems SAS
Zone EUROPARC Bâtiment
EXA 16
16/18, rue Eugène Dupuis
94046 Creteil, France
Tel.: +33-1 58 43 90 28
Fax: +33-1 58 43 90 03
info.fr@mtssensors.com
www.mtssensors.com

GERMANY
MTS Sensor Technologie
GmbH & Co. KG
Auf dem Schüffel 9
58513 Lüdenscheid, Germany
Tel. +49-23 51-95 87 0
Fax +49-23 51-5 64 91
info.de@mtssensors.com
www.mtssensors.com

CHINA
MTS Sensors
Room 504, Huajing Commercial Center,
No. 188, North Qinzhou Road
200233 Shanghai, China
Tel: +86-21 6485 5800
Fax: +86-21 6495 6329
info.cn@mtssensors.com
www.mtssensors.com

ITALY
MTS Systems Srl.Sensor Division
Via Diaz,4
25050 Provaglio d'Iseo (BS), Italy
Tel.: +39-030 988 38 19
Fax: +39-030 982 33 59
info.it@mtssensors.com
www.mtssensors.com

LEGAL NOTICES

MTS, Tempsonics and Level Plus are registered trademarks of MTS Systems Corporation in the United States; MTS SENSORS and the MTS SENSORS logo are trademarks of MTS Systems Corporation within the United States. These trademarks may be protected in other countries. All other trademarks are the property of their respective owners.
Copyright © 2015 MTS Systems Corporation. No license of any intellectual property rights is granted. MTS reserves the right to change the information within this document, change product designs, or withdraw products from availability for purchase without notice. Typographic and graphics errors or omissions are unintentional and subject to correction. Visit www.mtssensors.com for the latest product information. Product change notification alerts are available through the MTS Product Change Management System; register at www.mtssensors.com/PCMS.

ISO 9001
CERTIFIED

