


HEAD BUSHES WITH ADJUSTABLE CUSHIONING


HYDRAULIC CAST IRON - G25
DOUBLE ACTING APPLICATION
'QR' CUSHIONING VALVE SUPPLIED
COMPLETE WITH FULL SEAL KIT
ALSO AVAILABLE IN FLANGED VERSION
MAX PRESSURE 200 BAR

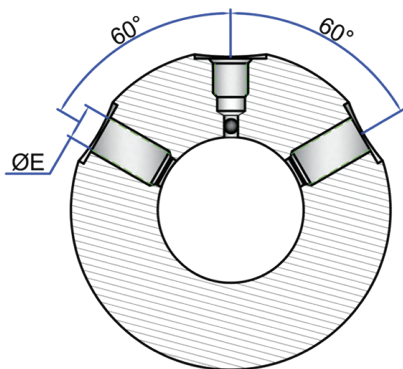

ORDER CODE	BORE Ø(mm)	D Ø(mm)	S Ø(mm)	D1 Ø(mm)	THREAD Ø(mm)	F (mm)	A (mm)	H (mm)
RP0201040020/2	40	63	20	50	45 x 1.5	28	90	35
RP0201050025/2	50	66	25	60	54 x 1.75	32	100	40
RP0201065035/2	65	88	35	75	69 x 1.75	35	110	45
RP0201080040/2	80	99	40	90	85 x 2	36	125	55
RP0201100050/2	100	115	50	100	105 x 2	49	145	60


PLEASE NOTE: ALL CUSHIONING HEAD BUSHES ARE **NOT** SUITABLE FOR USE WITH STANDARD RAMPARTS® TUBES.

ORDER CODE	E Ø(gas)	QR VALVE (type)	LF (mm)
RP0201040020/2	1/4"	QR2	30
RP0201050025/2	1/4"	QR2	25
RP0201065035/2	3/8"	QR3	28
RP0201080040/2	1/2"	QR4	34
RP0201100050/2	1/2"	QR4	38

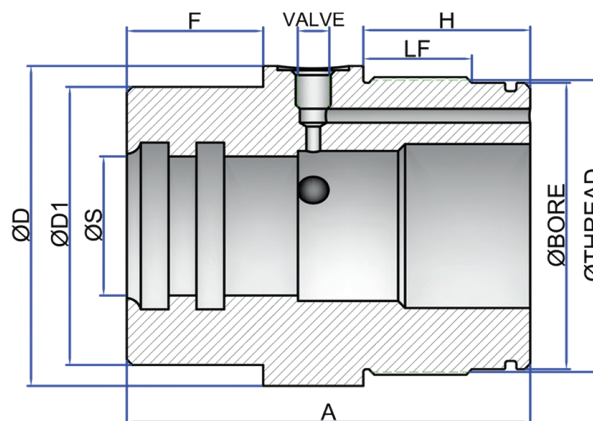

2 PART PISTONS FOR RAMS WITH ADJUSTABLE CUSHIONING



STEEL - C45 - UNI 7845-78
DOUBLE ACTING APPLICATION
COMPLETE WITH FULL SEAL KIT
MAX PRESSURE 200 BAR

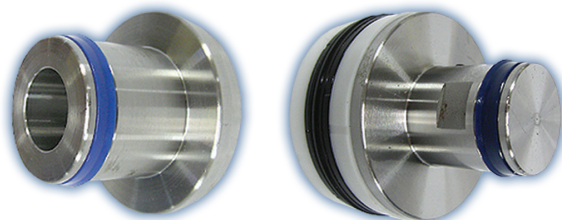


ORDER CODE	BORE Ø(mm)	D Ø(mm)	S Ø(mm)	F (mm)	A (mm)	H (mm)
RP0202040020	40	24	14	25	35	10
RP0202050025	50	30	16	29	40	11
RP0202065035	65	40	22	35	47	12
RP0202080040	80	45	27	40	55	15
RP0202100050	100	55	33	45	60	15

ORDER CODE	BORE Ø(mm)	D Ø(mm)	S1 Ø(mm)	A (mm)	THREAD Ø(mm)	F (mm)	H (mm)
RP0203040020	40	20	5	51	14 x 1.5	25	26
RP0203050025	50	24	5	58	16 x 1.5	29	29
RP0203065035	65	30	6	65	22 x 1.5	35	30
RP0203080040	80	38	6	75	27 x 2	40	35
RP0203100050	100	48	6	85	33 x 2	45	40

PLEASE NOTE: ALL CUSHIONING PISTONS ARE **NOT** SUITABLE FOR USE WITH OUR STANDARD RAMPARTS® RODS ON PAGES 73►76.

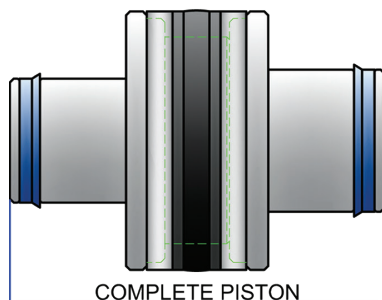

REAR PISTON (RP0203.)



FRONT PISTON (RP0202.)