


THREADED ENDS - TAPR...N SERIES

INSERT PLAIN BEARING TYPE 'SR'

ISO12240-1 - SERIES E

FITTED WITH GREASE NIPPLE

STEEL / STEEL COUPLING

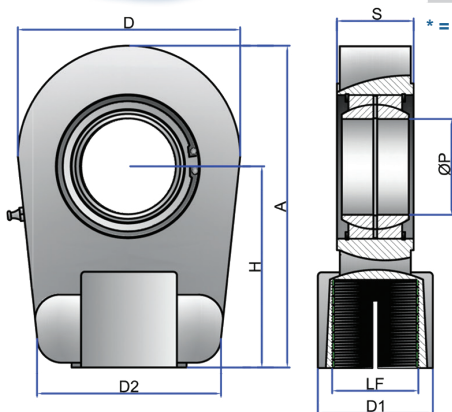

* = MATERIAL: NODULAR CAST IRON.

ORDER CODE	P Ø(mm)	D (mm)	A (mm)	S (mm)	H (mm)	D1 (mm)	D2 (mm)	LF (mm)	LB (mm)	DYNAMIC LOAD (kn)	STATIC LOAD (kn)
TAPR20N	20	56	80	19	50	25	46	16 x 1.5	17	30	81.1
TAPR25N	25	56	80	23	50	25	46	16 x 1.5	17	48	72
TAPR30N	30	64	94	28	60	32	50	22 x 1.5	23	62	106
TAPR35N	35	78	112	30	70	40	66	28 x 1.5	29	80	153
TAPR40N	40	94	135	35	85	49	76	35 x 1.5	36	100	250
TAPR50N	50	116	168	40	105	61	90	45 x 1.5	46	156	365
TAPR60N	60	130	200	50	130	75	120	58 x 1.5	59	245	400
TAPR70N	70	154	232	55	150	86	130	65 x 1.5	66	315	540
TAPR80N	80	176	265	60	170	105	160	80 x 2	81	400	670
TAPR90N*	90	206	322	65	210	124	180	100 x 2	101	490	980
TAPR100N*	100	231	360	70	235	138	200	110 x 2	111	610	1120
TAPR110N*	110	266	407	80	265	152	220	120 x 3	125	655	1700
TAPR120N*	120	340	490	90	310	172	257	130 x 3	135	950	2900

THREADED ENDS - TFI...FK / FK-2RS SERIES


INSERT PLAIN BEARING TYPE 'SR'

STEEL HOUSING - CK45 ZINC PLATED

ISO12240-4 - SERIES E TYPE F

FITTED WITH GREASE NIPPLE

STEEL / STEEL COUPLING

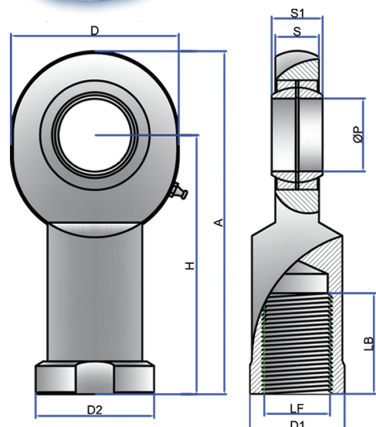

ORDER CODE	P Ø(mm)	D (mm)	A (mm)	S (mm)	H (mm)	D1 (mm)	D2 (mm)	LF (mm)	S1 (mm)	LB (mm)	DYNAMIC LOAD (kn)	STATIC LOAD (kn)
TFI06FK (1)	6	21	40.5	4.3	30	11	13	6 x 1	6	11	3.4	8.1
TFI08FK (1)	8	24	48	6	36	13	15	8 x 1.25	8	15	5.5	12.9
TFI10FK (1)	10	29	57.5	7	43	15	18	10 x 1.5	9	20	8.1	17.6
TFI12FK (1)	12	34	67	8	50	18	20	12 x 1.75	10	24	10.8	24.5
TFI15FK* (2)	15	40	81	10	61	21	24	14 x 2	12	30	17	36
TFI17FK* (2)	17	46	90	11	67	24	28	16 x 2	14	34	21.2	45
TFI20FK* (2)	20	53	103.5	13	77	32	35	20 x 1.5	16	40	30	60
TFI25FK*	25	64	126	17	94	36	42	24 x 2	20	48	48	83
TFI30FK*	30	73	146.5	19	110	41	50	30 x 2	22	56	62	110
TFI35FK*	35	82	166	21	125	50	58	36 x 3	25	60	80	146
TFI40FK*	40	92	188	23	142	55	65	39 x 3	28	67	100	180
TFI45FK*	45	102	196	27	145	60	70	42 x 3	32	65	127	240
TFI50FK*	50	112	216	30	160	65	75	45 x 3	35	69	156	290
TFI60FK*	60	135	242	38	175	75	88	52 x 3	44	73	245	450
TFI70FK*	70	160	280	42	200	80	98	56 x 4	49	80	315	610
TFI80FK*	80	180	320	47	230	100	110	64 x 4	55	85	400	695

* = ALSO AVAILABLE IN TFI...FK-2RS TYPE WITH PROTECTION RINGS FITTED. PLEASE QUOTE PART NUMBER AND ADD '-2RS' (EXAMPLE = TFI40FK-2RS).

(1) NON-LUBRICATABLE.

(2) LUBRICATION BY GREASING HOLE.