


THREADED ENDS - TFI...PW SERIES

INSERT PLAIN BEARING
ISO12240-4 - SERIES K ISO6126
MAINTENANCE FREE
STEEL / PTFE COUPLING

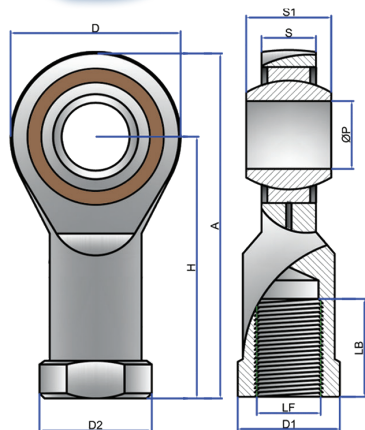

ORDER CODE	P Ø(mm)	D (mm)	A (mm)	S (mm)	H (mm)	D1 (mm)	D2 (mm)	LF (mm)	S1 (mm)	LB (mm)	DYNAMIC LOAD (kn)	STATIC LOAD (kn)
TFI05PW	5	18	36	7.5	27	10	12	5 x 0.8	8	8	3.6	4.6
TFI06PW	6	20	40	7.5	30	10	13	6 x 1	9	9	4.7	5.2
TFI08PW	8	24	48	9.5	36	13	16	8 x 1.25	12	12	7.6	8.2
TFI10PW	10	30	58	11.5	43	16	19	10 x 1.5	14	15	12	15
TFI12PW	12	34	67	12.5	50	18	22	12 x 1.75	16	18	14	19
TFI14PW	14	38	76	14.5	57	21	25	14 x 2	19	21	19	24
TFI16PW	16	42	85	15.5	64	24	27	16 x 2	21	24	23	29
TFI18PW	18	46	94	17.5	71	27	31	18 x 1.5	23	27	29	34
TFI20PW	20	50	102	18.5	77	30	34	20 x 1.5	25	30	34	40
TFI22PW	22	56	112	21	84	34	37	22 x 1.5	28	33	42	50
TFI25PW	25	60	124	23	94	36	42	24 x 2	31	36	52	57
TFI28PW	28	66	136	26	103	41	46	27 x 2	35	41	66	69
TFI30PW(1)	30	70	145	27	110	46	50	30 x 2	37	45	73	77
TFI35PW	35	80	166	28	126	50	58	36 x 2	43	58	94	97



TFI10PW-MB*	10	30	58	11.5	43	16	19	10 x 1.25	14	15	12	15
TFI12PW-MB*	12	34	67	12.5	50	18	22	12 x 1.25	16	18	14	19
TFI16PW-MB*	16	42	85	15.5	64	24	27	16 x 1.5	21	24	23	29

* = VERSION WITH CETOP TYPE THREAD.

(1) THIS SIZE IS AVAILABLE WITH M27x2 THREAD VARIATION ON REQUEST.

THREADED ENDS - TFE...MK / MK-2RS SERIES

INSERT PLAIN BEARING TYPE 'SR'
STEEL HOUSING - CK45 ZINC PLATED
ISO12240-4 - SERIES E TYPE M
FITTED WITH GREASE NIPPLE
STEEL / STEEL COUPLING

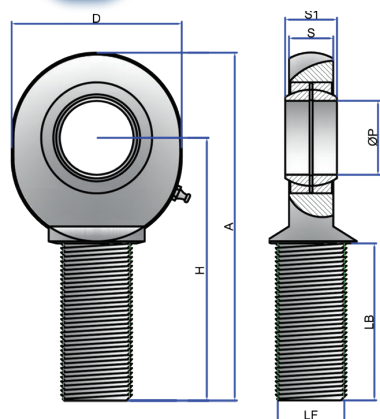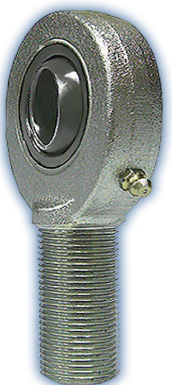

ORDER CODE	P Ø(mm)	D (mm)	A (mm)	S (mm)	H (mm)	LF (mm)	S1 (mm)	LB (mm)	DYNAMIC LOAD (kn)	STATIC LOAD (kn)
TFE06MK (1)	6	21	46.5	4.3	36	6 x 1	6	18	3.4	10.2
TFE08MK (1)	8	24	54	6	42	8 x 1.25	8	22	5.5	16
TFE10MK (1)	10	29	62.5	7	48	10 x 1.5	9	27	8.1	22
TFE12MK (1)	12	34	71	8	54	12 x 1.75	10	30	10.8	30.4
TFE15MK (2)	15	40	83	10	63	14 x 2	12	34	17	44.8
TFE17MK* (2)	17	46	92	11	69	16 x 2	14	36	21.2	56.5
TFE20MK* (2)	20	53	104.5	13	78	20 x 1.5	16	43	30	75.6
TFE25MK*	25	64	126	17	94	24 x 2	20	53	48	88.2
TFE30MK*	30	73	146.5	19	110	30 x 2	22	65	62	119
TFE35MK*	35	82	181	21	140	36 x 3	25	82	80	159
TFE40MK*	40	92	196	23	150	39 x 3	28	86	100	194
TFE45MK*	45	102	218	27	163	42 x 3	32	94	127	259
TFE50MK*	50	112	241	30	185	45 x 3	35	106	156	313
TFE60MK*	60	135	277.5	38	210	52 x 3	44	115	245	485
TFE70MK*	70	160	315	42	235	56 x 4	49	125	315	564
TFE80MK*	80	180	360	47	270	64 x 4	55	140	400	689

* = ALSO AVAILABLE IN TFE...MK-2RS TYPE WITH PROTECTION RINGS FITTED. PLEASE QUOTE PART NUMBER AND ADD '-2RS' (EXAMPLE = TFE40MK-2RS).

(1) NON-LUBRICATABLE.

(2) LUBRICATION BY GREASING HOLE.