



BURST VALVES

STEEL

350 BAR MAX PRESSURE






ORDER CODE	THREAD Ø(bsp)	A (mm)	P Ø (mm)	S (mm)	LF (mm)	MAXIMUM FLOW (ltr/min)
RPVP7	1/4"	19	1.8	0.8	8	29
RPVP10	3/8"	23	3.4	1.5	12	45
RPVP13	1/2"	29	4.2	1.8	13	67
RPVP19	3/4"	34	6.2	2.25	18	169
RPVP25	1"	40	6.9	2.6	20	223

PLEASE NOTE: BURST VALVE PRESSURE SETTING DIAGRAM IS AVAILABLE ON REQUEST

BURST VALVE CARTRIDGES

STEEL BODY - ZINC PLATED

COMPLETE WITH 'RPVP' TYPE BURST VALVE
MAX PRESSURE 300 BAR (250 BAR FOR 1")

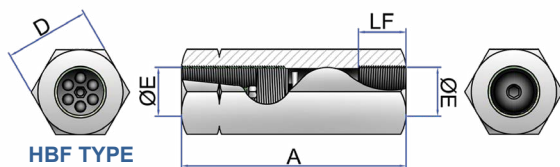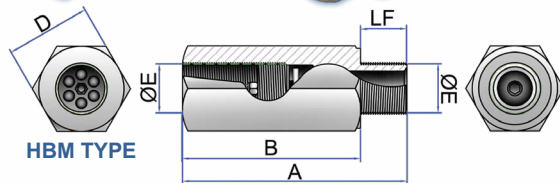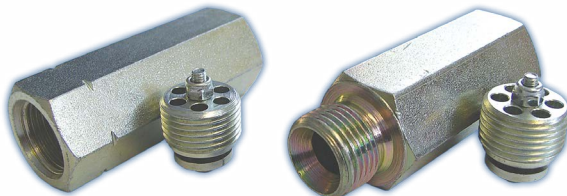

ORDER CODE	VALVE TYPE	A (mm)	B (mm)	D (mm)	LF (mm)	E Ø(bsp)
HBM14	RPVP7	50	38	19	12	1/4"
HBM38	RPVP10	60	48	22	12	3/8"
HBM12	RPVP13	63	49	27	14	1/2"
HBM34	RPVP19	75	59	32	16	3/4"
HBM1	RPVP25	88	70	41	18	1"

ORDER CODE	VALVE TYPE	A (mm)	B (mm)	D (mm)	LF (mm)	E Ø(bsp)
HBFB14	RPVP7	50	-	19	12	1/4"
HBFB38	RPVP10	58	-	22	14	3/8"
HBFB12	RPVP13	60	-	27	19	1/2"
HBFB34	RPVP19	76	-	32	19	3/4"
HBFB1	RPVP25	85	-	41	18	1"

FLOW DIVIDERS (2 WAY)


HARDENED & GROUND STEEL INTERNALS

CAST IRON / STEEL BODY


STANDARD & TEFLON SEAL (BUNA N)

LINE MOUNTING

MAX PRESSURE 250 BAR

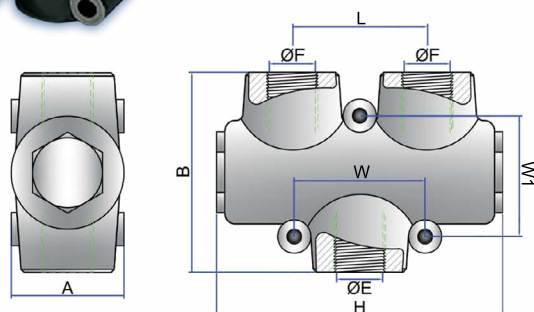

ORDER CODE	MIN / MAX (ltr/min)	A (mm)	B (mm)	H (mm)	L (mm)	W (mm)	W1 (mm)	F Ø(bsp)	E Ø(bsp)
VEQ08	1 / 3	48	68	117	53	40	45	3/8"	3/8"
VEQ10	3 / 6							3/8"	3/8"
VEQ15	6 / 10							3/8"	3/8"
VEQ20	10 / 20							3/8"	3/8"
VEQ22	20 / 32							3/8"	3/8"
VEQ25	25 / 40							1/2"	3/8"
VEQ30	40 / 60							1/2"	3/8"
VEQ35	60 / 80							1/2"	3/8"



PLEASE NOTE: A1 / B1 PORTS = RAM FEED / RETURN.
P1 PORT = OIL FEED / RETURN.